

SCREEDED CONCRETE SURFACE

TIE WIRE SUPPORT FROM TOP ANCHOR BOLTS TO STEEL GRID IN WALL CAVITY

ANCHOR BOLTS SPACING PREDRILLED INTO PANELS

HORIZ/VERT REINFORCEMENT AS PER CODE OR AS SPECIFIED

PANELS SCREWED TO WEB

1/2" (13mm) PLYWOOD FORMING PANELS


NUDURA 6" (152mm) STANDARD FORM UNIT

HORIZONTAL STEEL TIE WIRED TO VERTICALS NEAR TOP OF WALL AS SHOWN

CONTINUOUS CONC. BEAM TO FLOOR CONNECTION

WET SET DOWEL TO MATCH VERTICAL REINFORCEMENT BETWEEN POURS OR AS SPECIFIED

NUDURA ALIGNMENT SYSTEM (MUST BE SHIMMED 1/2" BELOW PLYWOOD TO MAINTAIN STRAIGHTNESS OF FORM)

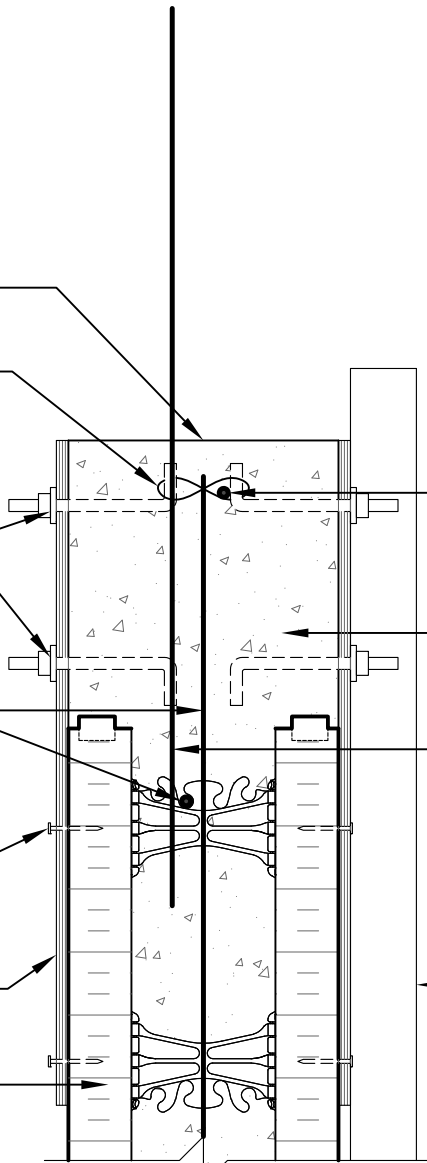

DISCLAIMER NOTICE: SPECIFIC INFORMATION REQUIRED FOR COMPLIANCE WITH LOCAL CODES IS THE RESPONSIBILITY OF THE DESIGNER



NUDURA

INTEGRATED BUILDING TECHNOLOGY

Building Value.

NUDURA 6" (152mm) FORM UNIT
STC / FIRE WALL DETAILS
INTERMEDIATE FLOOR CONNECTION
INTERIM CONSTRUCTION
METHOD

REV. NO.
004 KS
REV. DATE:
AUGUST 2010
DRAWN BY:
T. VAN CLIEAF

DWG NO.
FW6D2A
SCALE:
1 : 8