

NUDURA 8" (203mm)  
STANDARD FORM UNIT

BRICK VENEER c/w  
1" (25mm) AIR  
SPACE AND BRICK  
TIES

WET SET DOWELS TO  
MATCH VERTICAL  
REINFORCEMENT  
BETWEEN POURS OR  
AS SPECIFIED

FORM PANELS c/w  
INSERT WEBS-CUT TO  
SUIT FLOOR  
CONNECTION-ADDITIONAL  
FORM SUPPORT AS  
REQUIRED

THROUGH WALL  
FLASHING AS PER CODE  
OR AS SPECIFIED

NUDURA 8" (203mm)  
BRICK LEDGE FORM  
UNIT

$\frac{3}{16}$ " (5mm) ACRYLIC PARGE  
COAT

NUDURA WATERPROOF  
MEMBRANE

$\frac{1}{2}$ " (13mm) GYPSUM  
BOARD


HORIZ/VERT  
REINFORCEMENT AS  
PER CODE OR AS  
SPECIFIED

CAST IN PLACE  
CONCRETE FLAT  
SLAB

FINISH AS SPECIFIED

DOWELS FIELD BENT  
INTO SLAB AS  
SPECIFIED

$\frac{1}{2}$ " (13mm) GYPSUM  
BOARD

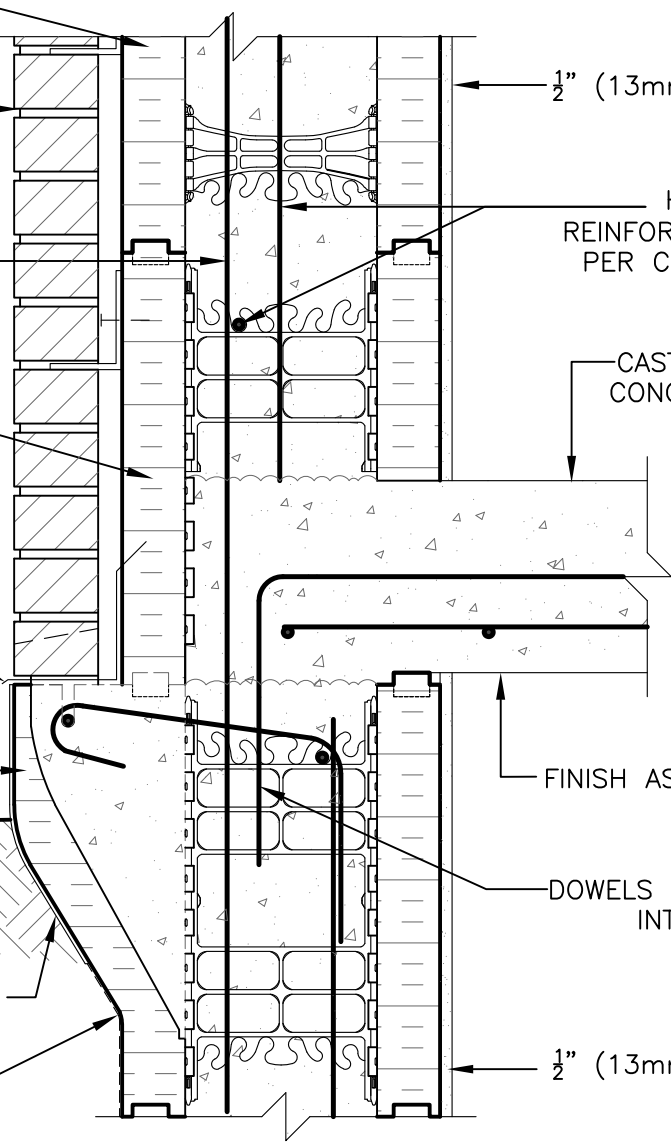

**DISCLAIMER NOTICE:**  
SPECIFIC INFORMATION  
REQUIRED FOR COMPLIANCE  
WITH LOCAL CODES IS THE  
RESPONSIBILITY OF THE  
DESIGNER



NUDURA 8" (203mm)  
BRICK LEDGE FORM UNIT  
CONCRETE FLAT PLATE  
BEARING WALL DETAIL  
BRICK VENEER FINISH

REV. NO. 000	DWG NO. D8E01
DATE: APRIL 2010	
DRAWN BY: K. STILL	SCALE: 1 : 8